



REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

rec'd PCT/PTO 22 APR 2005

10/532235

Receiving Office use only

International Application No.

International Filing Date

Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum) AL 0375 PCT/Do/K

Box No. I TITLE OF INVENTION

Retaining element for building sheets

Box No. II APPLICANT

☐ This person is also inventor

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

Corus Bausysteme GmbH
August-Horch-Strasse 20-22
56070 KOBLENZ
Germany

Telephone No.

+31 (251) 493448

Facsimile No.

+31 (251) 470252

Teleprinter No.

Applicant's registration No. with the Office

37341

State (that is, country) of nationality:

DE

State (that is, country) of residence:

DE

This person is applicant
for the purposes of:

☐ all designated
States

☒ all designated States except
the United States of America

☐ the United States
of America only

☐ the States indicated in
the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)

Schmütsch, Hans Heinrich
Goethestrasse 20
56179 VALLENDAR
Germany

This person is:

☐ applicant only

☒ applicant and inventor

☐ inventor only (If this check-box is
marked, do not fill in below.)

Applicant's registration No. with the Office

State (that is, country) of nationality:

DE

State (that is, country) of residence:

DE

This person is applicant
for the purposes of:

☐ all designated
States

☐ all designated States except
the United States of America

☒ the United States
of America only

☐ the States indicated in
the Supplemental Box

☐ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf
of the applicant(s) before the competent International Authorities as:

☒ agent

☐ common
representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

Van der Donk, Henricus Matheus
Corus Technology BV
P.O. Box 10000
1970 CA IJMUUDEN
The Netherlands

Telephone No.

+ 31 (251) 493348

Facsimile No.

+31 (251) 470252

Teleprinter No.

Agent's registration No. with the Office

☐ Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Box No. V DESIGNATIONS

The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regional and national patents.

However,

- ☐ DE Germany is **not designated** for any kind of national protection
- ☐ KR Republic of Korea is **not designated** for any kind of national protection
- ☐ RU Russian Federation is **not designated** for any kind of national protection

(The check-boxes above may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, of an earlier national application from which priority is claimed. See the Notes to Box No. V as to the consequences of such national law provisions in these and certain other States.)

Box No. VI PRIORITY CLAIM

The priority of the following earlier application(s) is hereby claimed:

| Filing date of earlier application (day/month/year) | Number of earlier application | Where earlier application is: | | |
|---|----------------------------------|--|---|--|
| | | national application: country or Member of WTO | regional application:* regional Office | international application: receiving Office |
| item (1) 2 October 2003 | 03078078.7 | | EPO | |
| item (2) 7 May 2004 | 04076371.6 | | EPO | |
| item (3) | | | | |

☐ Further priority claims are indicated in the Supplemental Box.

The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of this international application is the receiving Office) identified above as:

☒ all items ☐ item (1) ☐ item (2) ☐ item (3) ☐ other, see Supplemental Box

* Where the earlier application is an ARIPO application, indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which that earlier application was filed (Rule 4.10(b)(ii)):

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) (if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):

ISA /

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

| | | |
|-----------------------|----------|------------------------------|
| Date (day/month/year) | Number | Country (or regional Office) |
| 27 February 2004 | 03078078 | EPO The Hague |

Box No. VIII DECLARATIONS

The following declarations are contained in Boxes Nos. VIII (i) to (v) (mark the applicable check-boxes below and indicate in the right column the number of each type of declaration):

Number of
declarations


- | | | |
|---|--|---|
| <input type="checkbox"/> Box No. VIII (i) | Declaration as to the identity of the inventor | : |
| <input type="checkbox"/> Box No. VIII (ii) | Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent | : |
| <input type="checkbox"/> Box No. VIII (iii) | Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application | : |
| <input type="checkbox"/> Box No. VIII (iv) | Declaration of inventorship (only for the purposes of the designation of the United States of America) | : |
| <input type="checkbox"/> Box No. VIII (v) | Declaration as to non-prejudicial disclosures or exceptions to lack of novelty | : |

Box No. IX CHECK LIST; LANGUAGE OF FILING

| This international application contains: | | This international application is accompanied by the following item(s) (mark the applicable check-boxes below and indicate in right column the number of each item): | | Number of items |
|--|-----------|---|--|-----------------|
| (a) in paper form, the following number of sheets: | | 1. <input checked="" type="checkbox"/> fee calculation sheet | | 1 |
| request (including declaration sheets) : | 3 | 2. <input type="checkbox"/> original separate power of attorney | | |
| description (excluding sequence listing and/or tables related thereto) : | 6 | 3. <input type="checkbox"/> original general power of attorney | | |
| claims : | 1 | 4. <input type="checkbox"/> copy of general power of attorney; reference number, if any: | | |
| abstract : | 1 | 5. <input type="checkbox"/> statement explaining lack of signature | | |
| drawings : | 5 | 6. <input type="checkbox"/> priority document(s) identified in Box No. VI as item(s): | | |
| Sub-total number of sheets : | 16 | 7. <input type="checkbox"/> translation of international application into (language): | | |
| sequence listing : | | 8. <input type="checkbox"/> separate indications concerning deposited microorganism or other biological material | | |
| tables related thereto : | | 9. <input type="checkbox"/> sequence listing in computer readable form (indicate type and number of carriers) | | |
| (for both, actual number of sheets if filed in paper form, whether or not also filed in computer readable form; see (c) below) | | (i) <input type="checkbox"/> copy submitted for the purposes of international search under Rule 13ter only (and not as part of the international application) : | | |
| Total number of sheets : | 16 | (ii) <input type="checkbox"/> (only where check-box (b)(i) or (c)(i) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Rule 13ter : | | |
| (b) <input type="checkbox"/> only in computer readable form (Section 801(a)(i)) | | (iii) <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the sequence listing mentioned in left column : | | |
| (i) <input type="checkbox"/> sequence listing | | 10. <input type="checkbox"/> tables in computer readable form related to sequence listing (indicate type and number of carriers) | | |
| (ii) <input type="checkbox"/> tables related thereto | | (i) <input type="checkbox"/> copy submitted for the purposes of international search under Section 802(b-quater) only (and not as part of the international application) : | | |
| (c) <input type="checkbox"/> also in computer readable form (Section 801(a)(ii)) | | (ii) <input type="checkbox"/> (only where check-box (b)(ii) or (c)(ii) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Section 802(b-quater) : | | |
| (i) <input type="checkbox"/> sequence listing | | (iii) <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the tables mentioned in left column : | | |
| (ii) <input type="checkbox"/> tables related thereto | | 11. <input type="checkbox"/> other (specify): | | |
| Type and number of carriers (diskette, CD-ROM, CD-R or other) on which are contained the | | | | |
| <input type="checkbox"/> sequence listing: | | | | |
| <input type="checkbox"/> tables related thereto: | | | | |
| (additional copies to be indicated under items 9(ii) and/or 10(ii), in right column) | | | | |
| Figure of the drawings which should accompany the abstract: | 1 | Language of filing of the international application: | | English |

Box No. X SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).



ir. H.M. van der Donk

| For receiving Office use only | | 2. Drawings: <input type="checkbox"/> received: <input type="checkbox"/> not received: |
|---|---|--|
| 1. Date of actual receipt of the purported international application: | | |
| 3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application: | | |
| 4. Date of timely receipt of the required corrections under PCT Article 11(2): | | |
| 5. International Searching Authority (if two or more are competent): ISA / | 6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid | |

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

RETAINING ELEMENT FOR BUILDING SHEETS

The present invention relates to an elongate retaining element for building sheets having as seen in cross section perpendicular to its direction of elongation, a head part for engaging at least one building sheet. The invention further relates to an assembly
5 such a elongate retaining element engaging at least one building sheet member.

Such an elongate retaining element is known from GB-2167101-A, which discloses a retaining element having a head part and a base part connected by a connecting flange. The head part engages with the free end of at least one building
10 sheet, which is at least partially curved over the head part of the retaining element. The head part is substantially triangular in cross section and has rounded vertices that engage with the building sheet.

A disadvantage of such prior art retaining elements is that movement of the building sheets over the retaining element, caused by e.g. thermal expansion or wind
15 suction, generates unpleasant noise.

One proposed solution to the problem of noise is proposed in GB-342933-A in which the head part of the retaining element is provided with a solid coating comprising an organic powder coating.

Another proposed solution is known from DE-4217221-A1 disclosing a holding
20 element for use in roof constructions. The holding element is formed by a folded sheet with a curved end-section forming a head part. The head part co-operates via ball bearings or tapered wheels with a separate member extending across the direction of elongation of the holding element. The building sheet member is flanged over this separate member.

An object of the present invention is to provide an improved retaining element. A further preferred object of the present invention is to provide a retaining element that reduces the noise generated when building sheets when sliding in use over the head
25 part of the retaining element.

One or both of these objects are obtained by a retaining element having in plane
30 or as seen in cross section perpendicular to its direction of elongation, a head part which is substantially triangular in cross section, said head part comprising one or more movable rotationally symmetrical elements, said elements being positioned at one or more vertices of the triangle, and characterised in that said head part comprises one or more mountings in which the elements for engaging in use the building sheet
35 are mounted and in that the mountings are attached to the head part by fixing means.

The movable elements allow the engageable building sheet to slide over the head part. The presence of movable elements in the head part significantly reduces

the friction between the head part and the engageable building sheet enabling the building sheet to slide easily over the head part of the retaining element without generating significant noise. Wearing of the building sheet and the head part of the retaining element and resultant dust formation is also reduced. A further advantage is that reduced friction between the head part and the building sheet reduces the mechanical load on the joint with a support structure. A high mechanical load on the retaining element is particularly undesirable where the support structure to which a retaining element is attached is less robust such as for example, insulating glass wool or foam glass. By reducing the mechanical loading to which the retaining element is subjected the present invention reduces the risk of the retaining element failing. The movable elements are rotatable to facilitate the sliding of a building sheet over the head part. The movable elements are preferably rotationally symmetrical and can freely and smoothly rotate reducing the chance of noise generation as a building sheet slides over the head part of the retaining element. The head part comprises one or more mountings in which one or more movable elements are mounted. The mountings preferably extend in the direction of elongation of the retaining element. Of course the head part may comprise more than one mounting and each mounting may contain multiple movable elements. The mountings facilitate assembly of a retaining element, as the movable elements do not have to be individually mounted to the retaining element.

The head part of the retaining element is substantially triangular in cross section and has a movable element positioned at one or more vertices of the triangle. The movable elements are therefore positioned on the head part at the points where a building sheet contacts the head part and are thus optimally positioned to reduce the friction between the head part and a building sheet sliding over the head part.

In an embodiment the movable elements are preferably spherical and can thus rotate in all orientations further reducing the chance of noise generation. The spherical movable elements preferably have a diameter in a range of 1mm to 10mm to ensure that they can be easily mounted on the head part and effectively facilitate in use the sliding of a building sheet over the head part of the retaining element.

In an embodiment the movable elements are preferably made from metal, plastic or ceramic or a combination of these. Metal and ceramic are both hard and resistant to wearing offering good durability whilst plastic such as PTFE (polytetrafluoroethylene) is easily formable and resistant to temperature variations. The metal used is more preferably sinter metal e.g. sinter bronze for increased hardness and wear resistance.

In an embodiment the retaining element preferably comprises a base part and a connecting flange connecting the base part and the head part wherein the head part, excluding the mountings and movable elements, the base part and connecting flange are made from metal which can be extrusion formed or a combination of metal and plastic which provides an insulating barrier between the interior of a roofing or cladding assembly and the building sheets for example as known from EP-1236840-A1 (incorporated herein by reference). The head part, excluding the mountings and movable elements, the base part and connecting flange are preferably formed from extruded aluminium.

The retaining element known from international application WO-98/53158 (incorporated herein by reference) may be provided with a head part as proposed in the present invention.

A further aspect of the invention relates to an assembly for roofing a building or cladding e.g. the façade of a building comprising one or more elongate retaining elements as described above whereby the free end of at least one building sheet is flanged over the head part of the elongate retaining element engaging one or more of the movable rotationally symmetrical elements, and having the advantages as set out above.

A further aspect of the invention relates to a mounting, in which movable elements are mountable, for use in the elongate retaining element according to the present invention.

The present invention is described further by way of example with reference to the accompanying schematic drawings in which:

Fig.1 shows a cross section perpendicular to the direction of elongation through a retaining element according to the invention;

Fig. 2 shows a side view of a retaining element according to the invention;

Fig. 3 shows a retaining element according to the invention engaging with building sheets;

Fig. 4 shows a further retaining element according to the invention engaging with building sheets;

Fig. 5A to 5C show a further retaining element according to the invention in three different directions;

Fig. 6 show a mounting for holding bearings as used in the retaining element of Fig. 5;

5 Fig. 1 shows a retaining element comprising a head part 1, a connecting flange 2 and a base part 3 where the connecting flange 2 connects the base part 3 to the head part 1. The head part 1 of the retaining element is preferably substantially triangular and comprises mountings 5 into which movable elements 4 in the form of ball bearings are mounted. The movable elements could also be for example cylindrical or rugby-
10 ball shaped. The movable elements may be made from metal, in particular sinter metal such as sinter bronze, plastic or ceramic. The mountings 5 may be attached by snap-fitting or a lock nut or may be fixed with adhesive or other fixing means. The mountings may be made of plastic which provides an insulation layer between the building sheets and the connecting flange and base parts of the retaining element and also resiliently
15 retains the movable elements. The mountings may also be made from metal for durability. The head part of the retaining element, excluding the mountings and movable elements, the connecting flange and base parts of the retaining element are preferably made from metal or a combination of metal and plastic. The head part of the retaining element, excluding the mountings and movable elements, the connecting
20 flange and base parts of the retaining element are preferably made from extruded aluminium.

Fig. 2 shows a side view of a retaining element according to the invention. The numbering is in accordance with Fig. 1 as described above. It can be seen that the mountings 5 in which the movable elements 4 are mounted preferably extend in the
25 direction of elongation of the retaining element.

Fig. 3 shows a retaining element according to the invention and numbered in accordance with Fig. 1 as described above. The head part of the retaining element is substantially triangular in cross section. The retaining element is engaging with building sheets 6 and 7. Building sheets 6 and 7 have upstanding flanges 6a and 7a
30 respectively, which end in curved portions 6b and 7b that curve around head portion 1 of the retaining element. The base part of the retaining element is mounted on a support structure 8 which can be for example a roof girder.

Fig. 4 shows a retaining element according to the invention and numbered in accordance with figures 1 and 3 as described above. The head part of the retaining
35 element is substantially triangular in cross section and comprises cut away portions 10,11 adjacent the connecting flange 2 which form grooves extending along the

direction of elongation of the retaining element. The retaining element is engaging with building sheets 6 and 7 which have upstanding flanges 6a and 7a respectively. The upstanding flanges end in curved portions 6b and 7b that curve around head portion 1 of the retaining element. The curved portions 6b and 7b of the building sheets can
 5 extend into the cut-away portions or grooves 10 and 11 which improve the engagement of the head part with the building sheets. The base part of the retaining element is mounted on a support structure 8 which can be for example a roof girder.

The retaining elements can of course also be mounted horizontally for example as part of a wall cladding or façade assembly for a building, or at other angles from the
 10 vertical.

Fig. 5A shows another embodiment of the retaining element according to the invention as seen in the direction of elongation. In the head part 1 a mounting or holder is provided holding movable elements 4, preferably bearings and more preferably ball bearings, each bearing is located at the vertices of a triangle. The mounting or holder
 15 is preferably made of one single element, see Fig. 6. Fig. 5C shows a top view of the retaining element of Fig. 5A, in which there are providing three mountings each having three ball bearings 4. The mountings (not shown) are preferably arranged at regular intervals. In this embodiment three mountings are shown, but it will be apparent to the skilled person that the retaining element should have one or more of such mountings
 20 with bearings, e.g. one, two, three, four, or more of the mountings could be inserted into the head part 1 of the retaining element. Each mounting with the bearings is located in the head part of the retaining element and is arranged in grooves or slots in the head part of the retaining element. Such grooves are preferably substantially perpendicular to the direction of elongation of the retaining element. Where the
 25 retaining element is made from an extrusion, the grooves are preferably cut or machined into the head part of the retaining element. The mountings are preferably coupled to the retaining element to prevent sliding out in service from the head part. Such a coupling could be achieved using locking means 11, for example a lock nut, applied through the head part of the retaining element. Fig. 5B shows a side view of
 30 the retaining element of Fig. 5A.

Fig. 6 shows schematically a mounting 12 or holder which can be used in the retaining element of Fig. 5. The bearings are fitted into the mounting in recesses at the vertices. Preferably there is provided a central bore for accommodating a lock for coupling the mounting in the head part of the retaining element. Such a mounting 12 is
 35 preferably made from a metal such as an extruded aluminium alloy or from a plastic material, although other suitable materials may be used.

Having now fully described the invention, it will be apparent to one of ordinary skill in the art that many changes and modifications can be made without departing from the spirit or scope of the invention as hereon described.

CLAIMS

1. Elongate retaining element for building sheets, having in plane perpendicular to its direction of elongation, a head part which is substantially triangular in cross section, said head part comprising one or more movable rotationally symmetrical elements, said elements being positioned at one or more vertices of the triangle, characterised in that said head part comprises one or more mountings in which the elements for engaging the building sheet are mounted and in that the mountings are attached to the head part by fixing means.
2. Elongate retaining element according to claim 1, wherein the movable rotationally symmetrical elements are spherical.
3. Elongate retaining element according to claim 1 or 2, wherein the movable rotationally symmetrical elements are of diameter in the range of 1 mm to 10 mm.
4. Elongate retaining element according to any one of the claims 1 to 3 wherein the movable rotationally symmetrical elements are made from metal, plastic or ceramic or combinations thereof.
5. Elongate retaining element according to any one of claims 1 to 4, wherein the retaining element comprises a base part and a connecting flange connecting the base part and the head part wherein the head part, excluding the mountings and movable rotationally symmetrical elements, the base part and connecting flange are made from metal or a combination of metal and plastic.
6. Elongate retaining element according to any of the claims 1 to 5, wherein the fixing means for attaching the mounting to the head part comprise a snap-fitting, a lock nut or adhesive.
7. Assembly for roofing a building or forming a building façade comprising one or more elongate retaining elements according to any one of the preceding claims.
8. Mounting, in which movable elements are mountable, for use in the elongate retaining element according to any one of claims 1 to 6.

ABSTRACT

The invention relates to an elongate retaining element for building sheets, having in plane perpendicular to its direction of elongation, a head part which is substantially triangular in cross section, said head part comprising one or more movable rotationally symmetrical elements, said elements being positioned at one or more vertices of the triangle, wherein said head part comprises one or more mountings in which the elements for engaging the building sheet are mounted and in that the mountings are attached to the head part by fixing means.

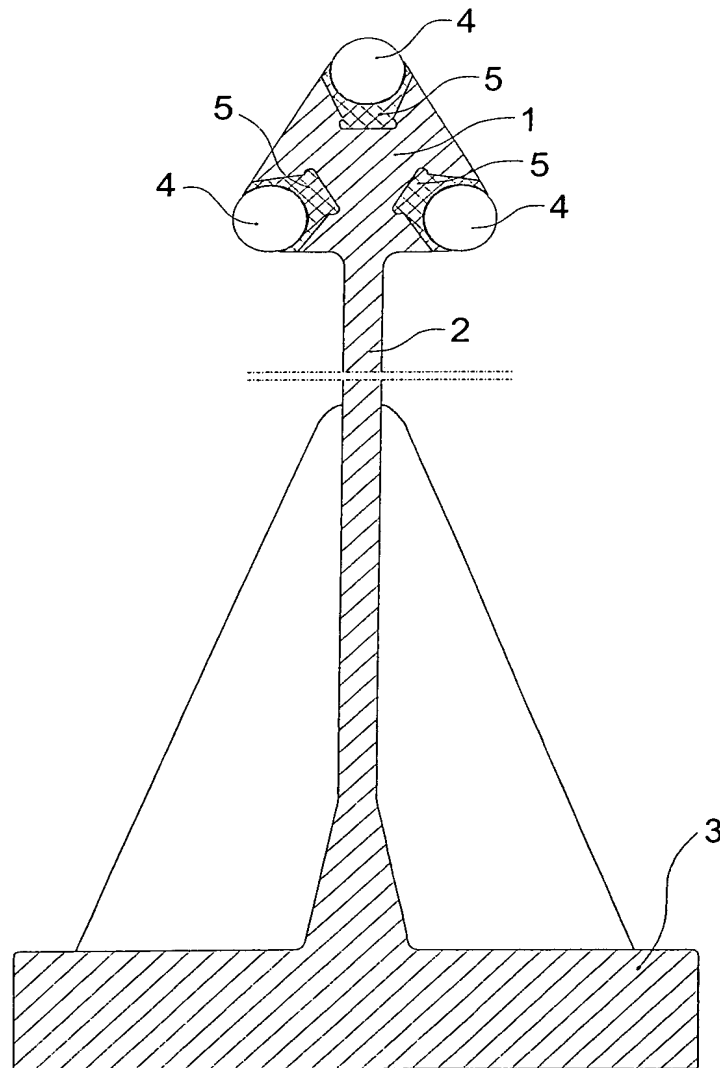


FIG. 1

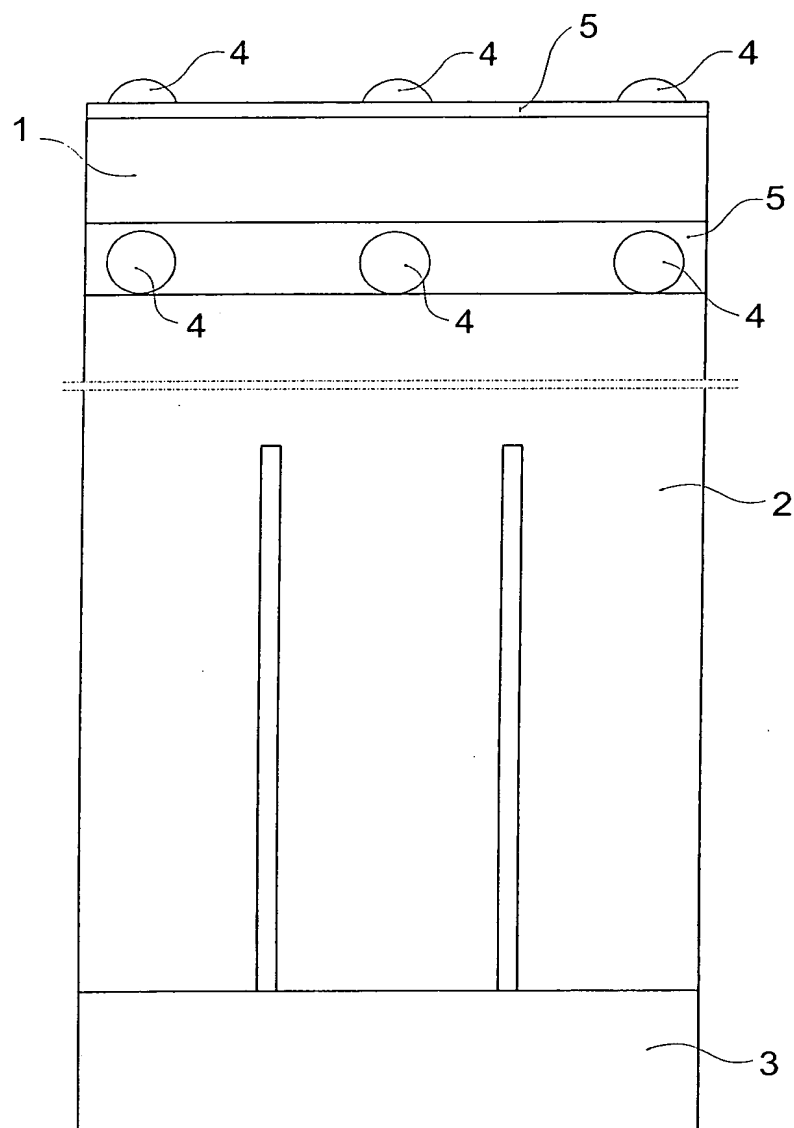


FIG. 2

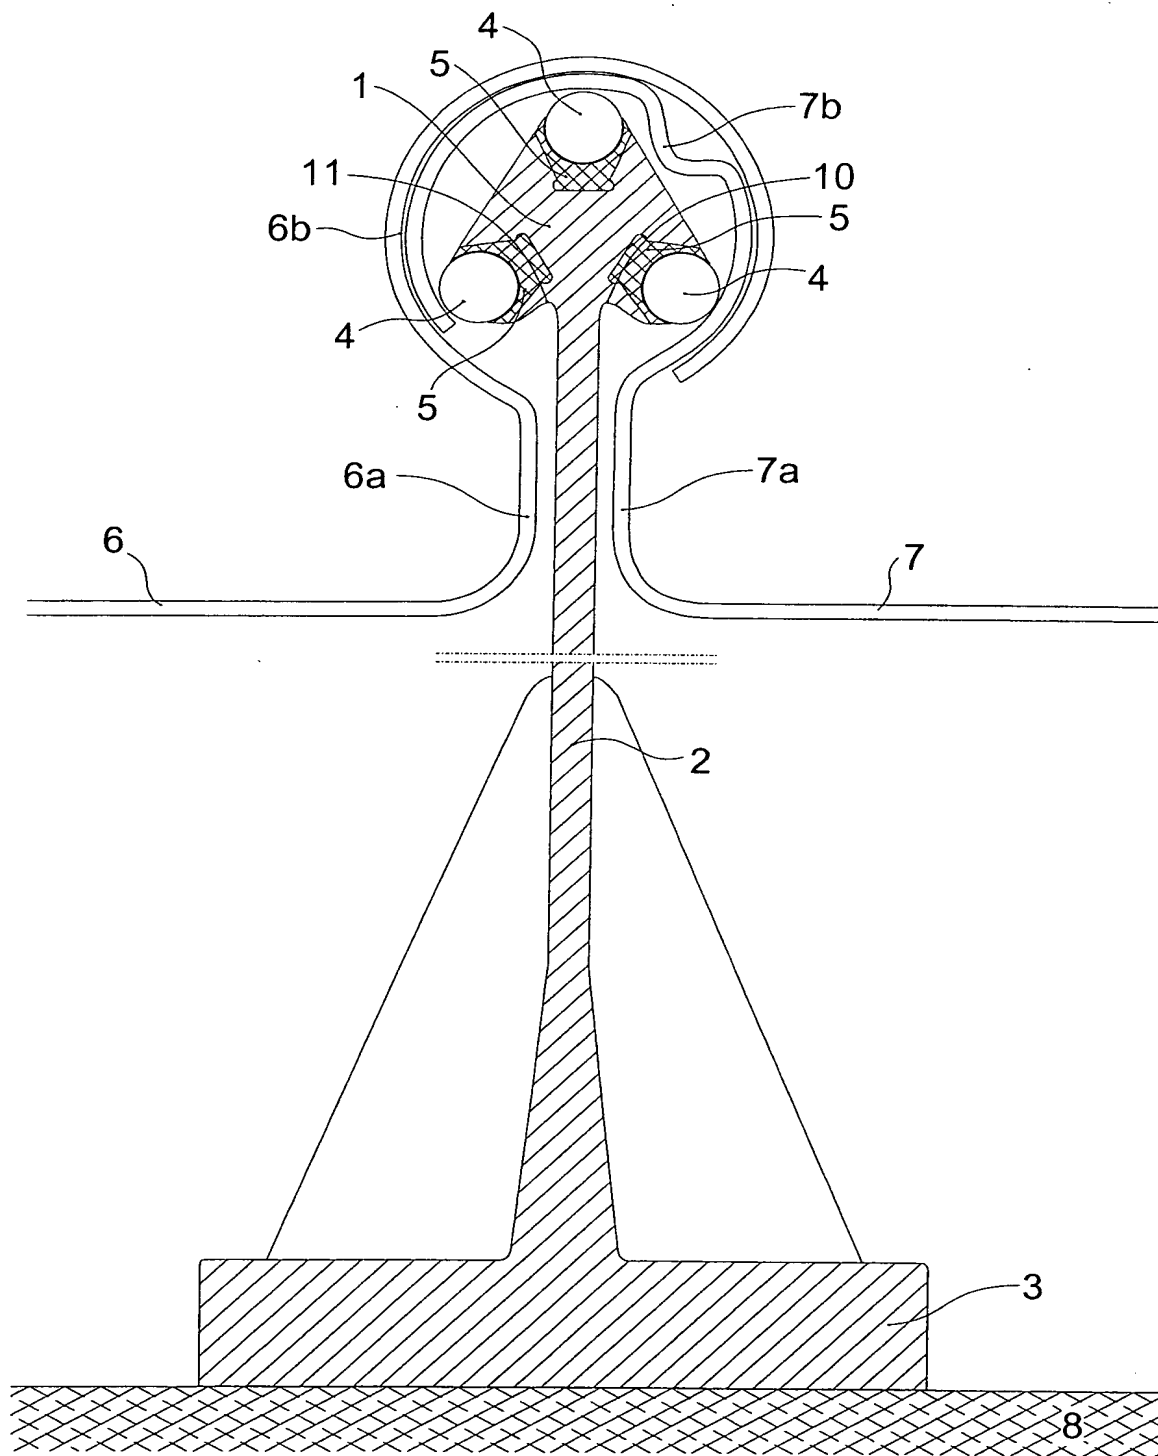


FIG. 3

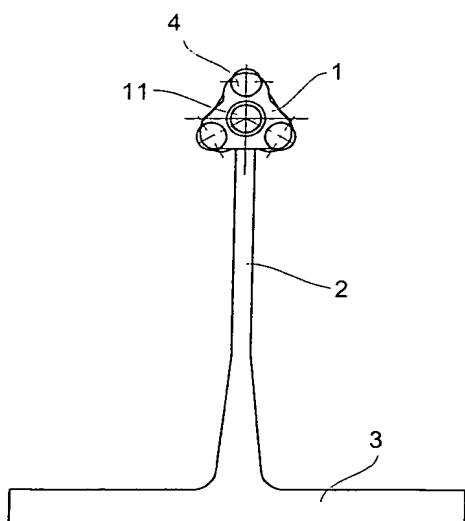


Fig. 5A

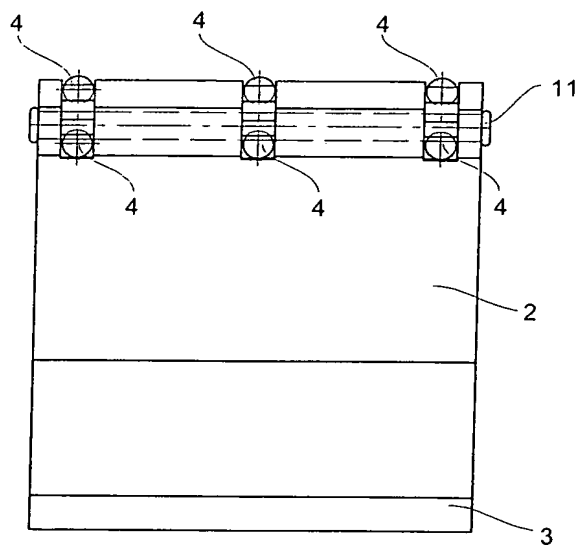


Fig. 5B

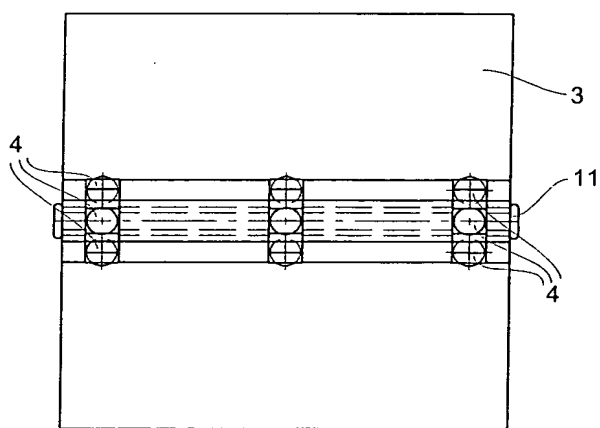


Fig. 5C

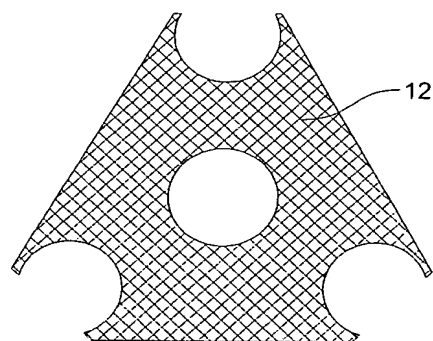


Fig. 6